



Huawei CloudEngine 6870 Switch Datasheet

CloudEngine 6870 series provide high-density 10GE access to help enterprises and carriers build a scalable data center network platform in the cloud computing era. They can also be used as aggregation or core switches for enterprise campus networks.

Product Overview

Huawei CloudEngine 6870 series switches are next-generation 10GE Ethernet switches designed for data centers and high-end campus networks, providing high-performance, high-density 10GE ports, and low latency. The CloudEngine 6870 series have advanced hardware architecture with 100GE uplink ports and high-density 10GE access ports. The 4 GB buffer can effectively cope with traffic bursts in video and search services.

Using the Huawei VRP8 software platform, CloudEngine 6870 series switches provide extensive data center service features and high stacking capability. In addition, the airflow direction (front-to-back or back-to-front) can be changed. CloudEngine 6870 series can work with CloudEngine 16800 or CloudEngine 12800 switches to build an elastic, virtualized, high-quality fabric with end-to-end large buffer, meeting the requirements of cloud-computing data centers.

CloudEngine 6870 series provide high-density 10GE access to help enterprises and carriers build a scalable data center network platform in the cloud computing era. They can also be used as aggregation or core switches for enterprise campus networks.

Product Appearance

CloudEngine 6870-48T6CQ-EI provides 48*10GE BASE-T ports, 6*100GE QSFP28 ports or 6*40GE QSFP+ ports.



CloudEngine 6870-48S6CQ-EI provides 48*10GE SFP+ ports, 6*100GE QSFP28 ports or 6*40GE QSFP+ ports.



CloudEngine 6875-48S4CQ-EI provides 48*10GE SFP+ ports, 4*100GE QSFP28 ports or 4*40GE QSFP+ ports.



Product Characteristics

Large Buffer, High-Density Access

- High-density 10GE access capability
- » CloudEngine 6870 series (1 U ToR switches) provide 835 Mpps forwarding performance and supports L2/L3 line-rate forwarding.
- » CloudEngine 6870 series provide up to 48*10GE ports, allowing for high-density 10GE server access.

» CloudEngine 6870 series provide six 100GE QSFP28 ports. Each QSFP28 port can be used as one 40GE QSFP+ port, four 25GE SFP28 ports, or four 10GE SFP+ ports, providing flexibility in networking. The 100GE uplink ports can be connected to CE12800 switches to build a 100GE fully-connected network platform without oversubscription.

- Super large buffer size

» All ports on CloudEngine 6870 series support ingress distributed buffering to effectively cope with traffic bursts.

» CloudEngine 6870 series provide a 4 GB buffer, which is dynamically shared among all ports. With this large buffer capacity, CloudEngine 6870 switches can work with CE12800 switches to provide an end-to-end large buffer network solution to deliver more reliable network services.

Inter-device Link Aggregation, High Efficiency and Reliability

- CloudEngine 6870 series support multichassis link aggregation group (M-LAG), which enables links of multiple switches to aggregate into one to implement device-level link backup.
- Switches in an M-LAG system all work in active state to share traffic and back up each other, enhancing system reliability.
- Switches in an M-LAG system can be upgraded independently. During the upgrade, other switches in the system take over traffic forwarding to ensure uninterrupted services.
- M-LAG supports dual-homing to Ethernet, VXLAN, and IP networks, allowing for flexible networking.
- With the comprehensive inter-device link aggregation technology, the device networking coupling relationship evolves from stacking at the control plane to the use of M-LAG and then finally to coupling-free M-LAG Lite. This achieves active-active server access and zero interruption of services when upgrading switches.

Virtualized Gateway Achieves Fast Service Deployment

- CloudEngine 6870 series can work with a mainstream virtualization platform. As the high-performance, hardware gateway of an overlay network (VXLAN), the CloudEngine 6870 series can support more than 16 million tenants.
- CloudEngine 6870 series can connect to a cloud platform through an open API to provide unified management of software and hardware networks.
- The hardware gateway deployment enables fast service deployment without changing the customer network, providing investment protection.
- CloudEngine 6870 series support Border Gateway Protocol - Ethernet VPN (BGP-EVPN), which can run as the VXLAN control plane to simplify VXLAN configuration within and between data centers.

Converged Enhanced Ethernet, Allowing for Data, Storage, and Computing Traffic on One Network

- CloudEngine 6870 series switches support Fibre Channel over Ethernet (FCoE), which permits storage, data, and computing services to be transmitted on one network, reducing the costs of network construction and maintenance.
- CloudEngine 6870 series switches support centralized FCoE/FC gateway deployment, which makes network O&M simpler.
- Various CloudEngine 6870 series switches support multiple data center features: Priority-based Flow Control (PFC), Enhanced Transmission Selection (ETS) and Data Center Bridging Exchange (DCBX). These features ensure low latency and zero packet loss for FC storage and high-speed computing services.

Full Openness and Programmability, Flexible Customization

- CloudEngine 6870 series use the Open Programmability System (OPS) embedded in the VRP8 software platform to provide programmability at the control plane.
- The OPS provides open APIs. APIs can be integrated with mainstream cloud platforms (including commercial and open cloud platforms) and third-party controllers. The OPS enables services to be flexibly customized and provides automatic management.
- Users or third-party developers can use open APIs to develop and deploy specialized network management policies to implement extension of fast service functions, automatic deployment, and intelligent management. The OPS also implements automatic operation and maintenance, and reduces management costs.
- CloudEngine 6870 series support CE modules for Ansible, which enables unified provisioning of physical and virtual networks.

- CloudEngine 6870 series can seamlessly integrate with systems of F5, an industry-leading application delivery network provider, to build an active-active data center network.
- The OPS provides seamless integration of data center service and network in addition to a service-oriented, software-defined networking (SDN).

Zero Touch Provisioning, Automatic O&M

- CloudEngine 6870 series support Zero Touch Provisioning (ZTP). ZTP enables CloudEngine 6870 series to automatically obtain and load version files from a USB flash drive or file server, freeing network engineers from onsite configuration or deployment. ZTP reduces labor costs and improves device deployment efficiency.
- ZTP provides built-in scripts for users through open APIs. Data center personnel can use the programming language they are familiar with, such as Python, to provide unified configuration of network devices.
- ZTP decouples configuration time of new devices from device quantity and area distribution, which improves service provisioning efficiency.

MACsec Hardware Encryption, High Security and Reliability

- CloudEngine 6875 supports MACsec, which provides hop-by-hop data encryption and secure MAC-layer data sending and receiving services including user data encryption, data frame integrity check, and data source verification. The CloudEngine 6875 is applicable to networks that require high data confidentiality, such as those of government and finance institutions.

FabricInsight-based Intelligent O&M

- The CloudEngine 6870 provides telemetry technology to collect device data in real time and send the data to Huawei data center network analyzer iMaster NCE-FabricInsight. The iMaster NCE-FabricInsight analyzes network data based on the intelligent fault identification algorithm, accurately displays the real-time network status, effectively demarcates and locates faults in a timely manner, and identifies network problems that affect user experience, accurately guaranteeing user experience.

iMaster NCE-based Simplified Network Deployment

- CloudEngine 6870 series switches can interconnect with iMaster NCE-Fabric through standard protocols such as NetConf and SNMP to implement network automatic management and control, providing more efficient and intelligent operation methods, simplifying network management, and reducing the OPEX.

Flexible Airflow Design, High Energy Efficiency

- Flexible front-to-back/back-to-front airflow design
 - » CloudEngine 6870 series use front-to-back/back-to-front airflow design that isolates cold air channels from hot air channels. This design meets heat dissipation requirements in data center equipment rooms.
 - » Air can flow from front to back, or back to front when different fans and power modules are used.
 - » Redundant power modules and fans can be configured to ensure uninterrupted service transmission.
- Energy-saving technology
 - » CloudEngine 6870 series switches have energy-saving chips and can measure system power consumption in real time. Fan speed can be adjusted dynamically based on system consumption. These energy-saving technologies reduce O&M costs and contribute to a greener data center.

Clear Indicators, Simple Maintenance

- Clear indicators
 - » Port indicators clearly show port status and port speeds. The 100GE port indicators can show the states of all ports derived from the 100GE ports.
 - » State and stack indicators on both the front and rear panels enable operators to maintain the switch from either side.
 - » CloudEngine 6870 series switches support remote positioning. Operators can turn on remote positioning indicators on the switches they want to maintain, so that they can find switches easily in an equipment room full of devices.
- Simple maintenance

» The management port, fans, and power modules are on the front panel, which facilitates device maintenance.

» Data ports are located at the rear, facing servers. This simplifies cabling.

Licensing

CloudEngine 6870 supports both the traditional feature based licensing mode and the latest Huawei IDN One Software (N1 Huawei IDN One Software (N1 mode for short) licensing mode. The CloudFabric N1 business model combines the NCE controller, analyzer, and CloudEngine switch software for use in a range of common scenarios. This simplifies transactions, provides customers with more functions and value, and protects their software investment with Software License Portability.

Product	Feature	N1 Mandatory Software Packages			N1 Add on Software Packages
		Management	Foundation	Advanced	
CloudEngine 6870 Series Switch					Security Function Package
	Basic software	√	√	√	
	IPV6	√	√	√	
	VXLAN	√	√	√	
	Telemetry		√	√	
	MPLS			√	
	MACSec(Supported only by CE 6875)				√
Controller	SDN Automation		√	√	
iMaster NCE-FabricInsight Analyzer	Basic network analysis functions of Telemetry		√	√	
	Network Health (Intelligent O&M 1-3-5)			√	
Version Mapping		Select one from the three options. The Foundation software package contains functions from the Management software package, and the Advanced software package contains functions from the Foundation software package.			It is used with the Management, Foundation, or Advanced software package
For details about product function differences, refer to the product documentation.					

Note: V200R005C20, V200R019C10 and later versions can support N1 mode

Note: For detailed information of Huawei CloudFabric N1 Business Model, visit <https://e.huawei.com/en/material/networking/dcs/switch/03a0e69bfa2c4f168323ba94a75f1f09>

Product Specifications

Note: This content is applicable only to regions outside mainland China. Huawei reserves the right to interpret this content.

Functions and Features

Item	CloudEngine 6870-48T6CQ-EI	CloudEngine 6870-48S6CQ-EI	CloudEngine 6875-48S4CQ-EI
Device virtualization	iStack		
	M-LAG		
Network virtualization	VXLAN routing and bridging		
	BGP-EVPN		
	QinQ access VXLAN		
SDN	iMaster NCE-Fabric		
	VMware NSX (Supported only by CloudEngine 6870-48S6CQ-EI)		
Network convergence	FCoE		
	DCBX, PFC, ETS		
	RDMA and RoCE (RoCE v1 and RoCE v2)		
Programmability ⁴	Programming on the OPS		
	Ansible-based automatic configuration and open-source module release		
Traffic analysis	NetStream		
	sFlow		
VLAN	Adding access, trunk, and hybrid interfaces to VLANs		
	Default VLAN		
	QinQ		
	MUX VLAN		
	GVRP		
	Dynamic learning and aging of MAC addresses		
	Static, dynamic, and blackhole MAC address entries		
	Packet filtering based on source MAC addresses		
	MAC address limiting based on ports and VLANs		
IP routing	IPv4 routing protocols, such as RIP, OSPF, BGP, and IS-IS		
	IPv6 routing protocols, such as RIPng, OSPFv3, IS-ISv6, and BGP4+		
IPv6	IPv6 Neighbor Discovery (ND)		
	VXLAN over IPv6 (supported only by CloudEngine 6875-48S4CQ-EI)		
	IPv6 VXLAN over IPv4		
	Path MTU Discovery (PMTU)		
	TCP6, IPv6 ping, IPv6 tracer, IPv6 socket, UDP6, and Raw IP6 ⁴		
Multicast	IGMP, PIM-SM, PIM-DM, MSDP, and MBGP		
	IGMP snooping		
	IGMP proxy		

Item	CloudEngine 6870-48T6CQ-EI	CloudEngine 6870-48S6CQ-EI	CloudEngine 6875-48S4CQ-EI
	Fast leaving of multicast member interfaces		
	Multicast traffic suppression		
	Multicast VLAN		
	Multicast VXLAN		
Reliability	LACP		
	STP, RSTP, VBST, and MSTP		
	BPDU protection, root protection, and loop protection		
	Smart Link and multi-instance		
	DLDP		
	ERPS (G.8032)		
	VRRP, VRRP load balancing, and BFD for VRRP		
	BFD for BGP/IS-IS/OSPF/Static route		
QoS	Traffic classification based on Layer 2 headers, Layer 3 protocols, Layer 4 protocols, and 802.1p priority		
	Actions of ACL, CAR, re-marking, and scheduling		
	Queue scheduling algorithms, including PQ, WFQ and PQ+WFQ		
	Congestion avoidance mechanisms, including WRED and tail drop		
	Traffic shaping		
O&M	Network-wide path detection		
	Telemetry		
	ERSPAN+ (supported only by CloudEngine 6875-48S4CQ-EI)		
	Statistics on the buffer microburst status		
	VXLAN OAM: VXLAN ping, VXLAN tracet		
Configuration and maintenance	Console, Telnet, and SSH terminals		
	Network management protocols, such as SNMPv1/v2c/v3		
	File upload and download through FTP and TFTP		
	BootROM upgrade and remote upgrade		
	802.3az Energy Efficient Ethernet (EEE)		
	Hot patches		
	User operation logs		
	User operation logs		
	ZTP		
Security and management	MACsec (supported only by CloudEngine 6875-48S4CQ-EI)		
	Command line authority control based on user levels, preventing unauthorized users from using commands		

Item	CloudEngine 6870-48T6CQ-EI	CloudEngine 6870-48S6CQ-EI	CloudEngine 6875-48S4CQ-EI
	DoS, ARP, and ICMP attack defenses		
	Port isolation, port security, and sticky MAC		
	Binding of the IP address, MAC address, interface number, and VLAN ID		
	Authentication methods, including AAA, RADIUS, and HWTACACS		
	Remote Network Monitoring (RMON)		

Performance and Scalability

Item	CloudEngine 6870-48T6CQ-EI	CloudEngine 6870-48S6CQ-EI	CloudEngine 6875-48S4CQ-EI
Maximum number of MAC address entries	750K		
Maximum number of Forwarding routes (FIB IPv4/IPv6)	380K/128K		
ARP table size	750K		
Maximum number of VRF	4096		
IPv6 ND (Neighbor Discovery) table size	96K		
Maximum Number of multicast routes (Multicast FIB IPv4/IPv6)	32K/8K		
Maximum VRRP groups	1024		
Maximum number of ECMP paths	128		
Maximum ACL number	20K (Ingress/Egress sharing)		
Maximum Number of broadcast domains	32K		
Maximum number of BDIF	32K		
Maximum number of tunnel endpoints (VTEP)	2K		
Maximum number of lag group	1024/512/256		
Maximum number of links in a lag group	16/32/64		
Maximum number of MSTP instance	64		
VBST (Maximum number of VLANs where VBST can be configured)	240		

Note: This specification may vary between different scenarios. Please contact Huawei for details.

Hardware Specifications

Item		CloudEngine 6870-48T6CQ-EI	CloudEngine 6870-48S6CQ-EI	CloudEngine6875-48S4CQ-EI
Physical Features	Dimensions (W × D × H,mm)	442*420*43.6		
	Weight (excluding optical transceivers, power modules, and fan assemblies / including AC power modules and fan assemblies, excluding optical transceivers, kg)	7.0/9.8	5.8/8.6	9/12.6
	Switching capacity (Tbps)	2.16	2.16	1.76
	Forwarding performance (Mpps)	720	720	835
10GE SFP+ ports		NA	48	48
10GE BASE-T		48	NA	NA
100GE QSFP28 ports		6	6	4
Management interface	Out-of-band management port	1*GE management interface		2*GE RJ45 & SFP (combo) management interfaces
	Console port	1*RJ45		1*RJ45 + 1*MiniUSB (multiplexing)
	USB port	1		
CPU	Main frequency (GHZ)	1.5		
	Number of cores	8	4	8
Storage	RAM	4GB	4GB	8GB
	NOR Flash	32MB	16MB	32MB
	NAND Flash	1GB	1GB	2GB
System	System buffer	4GB	4GB	4GB
Power Supply System	Power modules	AC: 600W DC: 600W -48V	AC: 600W DC: 350 W -48V	AC: 600W AC&240V DC: 600W 240V DC: 600W 380V DC: 1200W -48V
	Rated voltage range(V)	AC: 100V to 240V AC DC: -48V to -60V	AC: 100V to 240V DC: -48V to -60V	100V to 240V AC 240V to 380V DC

Item	CloudEngine 6870-48T6CQ-EI	CloudEngine 6870-48S6CQ-EI	CloudEngine6875-48S4CQ-EI
			-48V to -60V DC
Maximum voltage range(V)	AC: 90V to 290V DC: -38.4V to -72V	AC: 90V to 290V DC: -38.4V to -72V	AC: 90V to 290V 240V HVDC: 188V to 290V 380V HVDC:188V to 400V DC DC: -38.4V to -72V
Maximum input current	AC 600W: 100V to 240V 9A -48V DC 600W: -48V to -60V 20A	AC 600W: 100V to 240V 9A DC 350W: -48V to -60V 11A	AC 600W: 100V to 240V 8A 240VDC 600W: 240V 4A 380VDC 600W: 240V to 380V 4A -48V DC1200W: -48 V to -60V 38A
Typical power	280W (100% traffic load, 3 m network cable and copper cable, normal temperature, dual power modules) 287W (100% traffic load, 3 m network cable, short-distance optical transceivers, normal temperature, dual power modules)	159W (100% traffic load, copper cable, normal temperature, dual power modules) 222W (100% traffic load, short-distance optical transceivers, normal temperature, dual power modules)	273W (100% traffic load, copper cable, normal temperature, dual power modules) 298W (100% traffic load, short-distance optical transceivers, normal temperature, dual power modules)
Maximum power	405W	333W	407W
Frequency (AC, HZ)	50/60		
Heat Dissipation	Air cooling		
Number of fan trays	2		
Heat dissipation airflow	Front-to-back or back-to-front airflow		
Maximum heat consumption (BTU/hr)	1382	1135	1389
Long-term operating temperature (°C)	0°C to 40°C (0-1800m) The temperature decreases by 1°C each time the altitude increases by 220 m.		
Storage temperature (°C)	-40°C to +70°C		
Relative humidity	5% to 95%		
Operating altitude (m)	Up to 5000		

Item		CloudEngine 6870-48T6CQ-EI	CloudEngine 6870-48S6CQ-EI	CloudEngine6875-48S4CQ-EI
Environment specifications	Sound power at 27°C (dBA)	Front-to-back airflow: < 68 dBA Back-to-front airflow: < 66 dBA	Front-to-back airflow: < 62 dBA Back-to-front airflow: < 62 dBA	Front-to-back airflow: < 63 dBA Back-to-front airflow: < 65 dBA
	Sound power at 40°C (dBA)	Front-to-back airflow: < 84 dBA Back-to-front airflow: < 83 dBA	Front-to-back airflow: < 82 dBA Back-to-front airflow: < 83 dBA	Front-to-back airflow: < 78 dBA Back-to-front airflow: < 79 dBA
	Sound pressure at 27°C (dBA)	Front-to-back airflow: 54 dBA in average (maximum: 57 dBA) Back-to-front airflow: 52 dBA in average (maximum: 56 dBA)	Front-to-back airflow: 47 dBA in average (maximum: 51 dBA) Back-to-front airflow: 49 dBA in average (maximum: 55 dBA)	Front-to-back airflow: 47 dBA in average (maximum: 52 dBA) Back-to-front airflow: 48 dBA in average (maximum: 52 dBA)
	Surge protection	AC power supply protection: 6 kV in common mode and 6 kV in differential mode DC power supply protection: 4 kV in common mode and 2 kV in differential mode	AC power supply protection: 6 kV in common mode and 6 kV in differential mode DC power supply protection: 4 kV in common mode and 2 kV in differential mode	AC power supply protection: 4 kV in common mode and 2.5 kV in differential mode DC power supply protection: 4 kV in common mode and 2 kV in differential mode
Reliability	MTBF (year)	44.44	54.28	36.8
	MTTR (hour)	1.76	1.66	1.89
	Availability	0.99999548998	0.99999651887	0.99999511530

For detailed information of CloudEngine 6870 Platform hardware information, visit

<https://support.huawei.com/enterprise/en/doc/EDOC1000019246?idPath=7919710%7C21782165%7C21782239%7C22318540%7C7597815>

Safety and Regulatory Compliance

The following table lists the safety and regulatory compliance of CloudEngine switches.

Certification Category	Description
Safety	<ul style="list-style-type: none"> EN 60950-1 EN 60825-1 EN 60825-2 UL 60950-1 CSA-C22.2 No. 60950-1 IEC 60950-1 AS/NZS 60950-1 GB4943
Electromagnetic Compatibility	<ul style="list-style-type: none"> EN 300386

Certification Category	Description
(EMC)	<ul style="list-style-type: none"> • EN 55032: CLASS A • EN 55024 • IEC/EN 61000-3-2 • IEC/EN 61000-3-3 • FCC 47CFR Part15 CLASS A • ICES-003: CLASS A • CISPR 32: CLASS A • CISPR 24 • AS/NZS CISPR32 • VCCI- CISPR32: CLASS A • GB9254 CLASS A
Environment	<ul style="list-style-type: none"> • 2011/65/EU EN 50581 • 2012/19/EU EN 50419 • (EC) No.1907/2006 • GB/T 26572 • ETSI EN 300 019-1-1 • ETSI EN 300 019-1-2 • ETSI EN 300 019-1-3 • ETSI EN 300 753 GR63

Note

EMC: electromagnetic compatibility

CISPR: International Special Committee on Radio Interference

EN: European Standard

ETSI: European Telecommunications Standards Institute

CFR: Code of Federal Regulations

FCC: Federal Communication Commission

IEC: International Electrotechnical Commission

AS/NZS: Australian/New Zealand Standard

VCCI: Voluntary Control Council for Interference

UL: Underwriters Laboratories

CSA: Canadian Standards Association

Supported MIBs

For details about the MIB information, visit

<https://support.huawei.com/hedex/hdx.do?docid=EDOC1100101219&lang=en&idPath=24030814%7C21782165%7C21782239%7C22318540%7C7597815>.

Optical Transceivers and Cable

For details about the optical transceivers and cables information, visit

<https://e.huawei.com/en/material/networking/dcs/switch/f6d91cf16df0474998087676a33fd41e>.

Ordering Information

Mainframe	
CE6870-EI-F-B00	CE6870-48T6CQ-EI Switch (48-Port 10GE RJ45, 6-Port 100GE QSFP28, 2*AC Power Module, 2*FAN Box, Port-side Exhaust)
CE6870-EI-B-B00	CE6870-48T6CQ-EI Switch (48-Port 10GE RJ45, 6-Port 100GE QSFP28, 2*AC Power Module, 2*FAN Box, Port-side Intake)
CE6870-48T6CQ-EI	CE6870-48T6CQ-EI Switch (48-Port 10GE RJ45, 6-Port 100GE QSFP28, Without Fan and Power Module)
CE6870-48S6CQ-EI	CE6870-48S6CQ-EI Switch (48-Port 10GE SFP+, 6-Port 100GE QSFP28, Without Fan and Power Module)
CE6870-EI-F-B0A	CE6870-48S6CQ-EI Switch (48-Port 10GE SFP+, 6-Port 100GE QSFP28, 2*AC Power Module, 2*FAN Box, Port-side Exhaust)
CE6870-EI-B-B0A	CE6870-48S6CQ-EI Switch (48-Port 10GE SFP+, 6-Port 100GE QSFP28, 2*AC Power Module, 2*FAN Box, Port-side Intake)
CE6875-48S4CQ-EI	CE6875-48S4CQ-EI Switch (48-Port 10GE SFP+, 4-Port 100GE QSFP28, Without Fan and Power Module)
CE6875-EI-F-B0A	CE6875-48S4CQ-EI Switch (48-Port 10GE SFP+, 4-Port 100GE QSFP28, 2*AC Power Module, 2*FAN Box, Port-side Exhaust)
CE6875-EI-B-B0A	CE6875-48S4CQ-EI Switch (48-Port 10GE SFP+, 4-Port 100GE QSFP28, 2*AC Power Module, 2*FAN Box, Port-side Intake)

Fan box		
Part Number	Product Description	Support Product
FAN-40HA-F	Fan box (HA, Front to Back, FAN panel side intake)	CE6870-48T6CQ-EI, CE6870-48S6CQ-EI
FAN-40HA-B	Fan box (HA, Back to Front, FAN panel side exhaust)	CE6870-48T6CQ-EI, CE6870-48S6CQ-EI
FAN-060A-F	Fan box (F, FAN panel side intake)	CE6875-48S4CQ-EI
FAN-060A-B	Fan box (B, FAN panel side exhaust)	CE6875-48S4CQ-EI

Power		
Part Number	Product Description	Support Product
PAC-600WA-F	600W AC Power Module (Front to Back, Power panel side intake)	CE6870-48T6CQ-EI, CE6870-48S6CQ-EI
PAC-600WA-B	600W AC Power Module (Back to Front, Power panel side exhaust)	CE6870-48T6CQ-EI, CE6870-48S6CQ-EI
PAC-600WB-F	600W AC&240V DC Power Module (Front to Back, Power panel side intake)	CE6875-48S4CQ-EI
PAC-600WB-B	600W AC&240V DC Power Module (Back to Front, Power panel side exhaust)	CE6875-48S4CQ-EI

Power		
PDC-350WA-F	350W DC Power Module (Front to Back, Power panel side intake)	CE6870-48S6CQ-EI
PDC-350WA-B	350W DC Power Module (Back to Front, Power panel side exhaust)	CE6870-48S6CQ-EI
PDC-1K2WA-B	1200W DC Power Module (Back to Front, Power panel side exhaust)	CE6875-48S4CQ-EI
PDC-1K2WA-F	1200W DC Power Module (Back to Front, Power panel side intake)	CE6875-48S4CQ-EI
PHD-600WA-F	600W HVDC Power Module (Power panel side intake)	CE6875-48S4CQ-EI
PHD-600WA-B	600W HVDC Power Module (Power panel side exhaust)	CE6875-48S4CQ-EI
PDC600S12-CF	600W DC Power Module (Front to Back, Power panel side intake)	CE6870-48T6CQ-EI
PDC600S12-CB	600W DC Power Module (Back to Front, Power panel side exhaust)	CE6870-48T6CQ-EI

Software	
CE68-LIC-VXLAN	CloudEngine 6800 VXLAN Function
CE68-LIC-TLM	CE6800 Telemetry Function
CE68-LIC-MACSEC	CE6800 MACsec Function
N1-CE68LIC-CFMM	N1-CloudFabric Management SW License for CloudEngine 6800
N1-CE68CFMM-SnS1Y	N1-CloudFabric Management SW License for CloudEngine 6800-SnS-1 Year
N1-CE68LIC-CFFD	N1-CloudFabric Foundation SW License for CloudEngine 6800
N1-CE68CFFD-SYS1Y	N1-CloudFabric Foundation SW License for CloudEngine 6800-SnS-1 Year
N1-CE68LIC-CFAD	N1-CloudFabric Advanced SW License for CloudEngine 6800
N1-CE68CFAD-SYS1Y	N1-CloudFabric Advanced SW License for CloudEngine 6800-SnS-1 Year
N1-CE68LIC-SEC	N1-CloudEngine 6800 Security Function
N1-CE68SEC-SnS1Y	N1-CloudEngine 6800 Security Function-SnS-1 Year


Networking and Applications

Data Center Applications

On a typical data center network that requires a large buffer, for example, a data center providing search and video services, CloudEngine 16800/CloudEngine 12800 switches can be used as core switches, whereas CloudEngine 6870 switches can be used as ToR switches and connect to CloudEngine 16800/CloudEngine 12800 switches using 100GE ports to build a 100GE network with end-to-end large buffer capacity. The

CloudEngine 12800 and CloudEngine 6870 switches use VXLAN to build a non-blocking Layer 2 network, which allows large-scale VM migrations and flexible service deployments.

Note: VXLAN technology can be also used on campus networks to support flexible service deployments in different service areas.

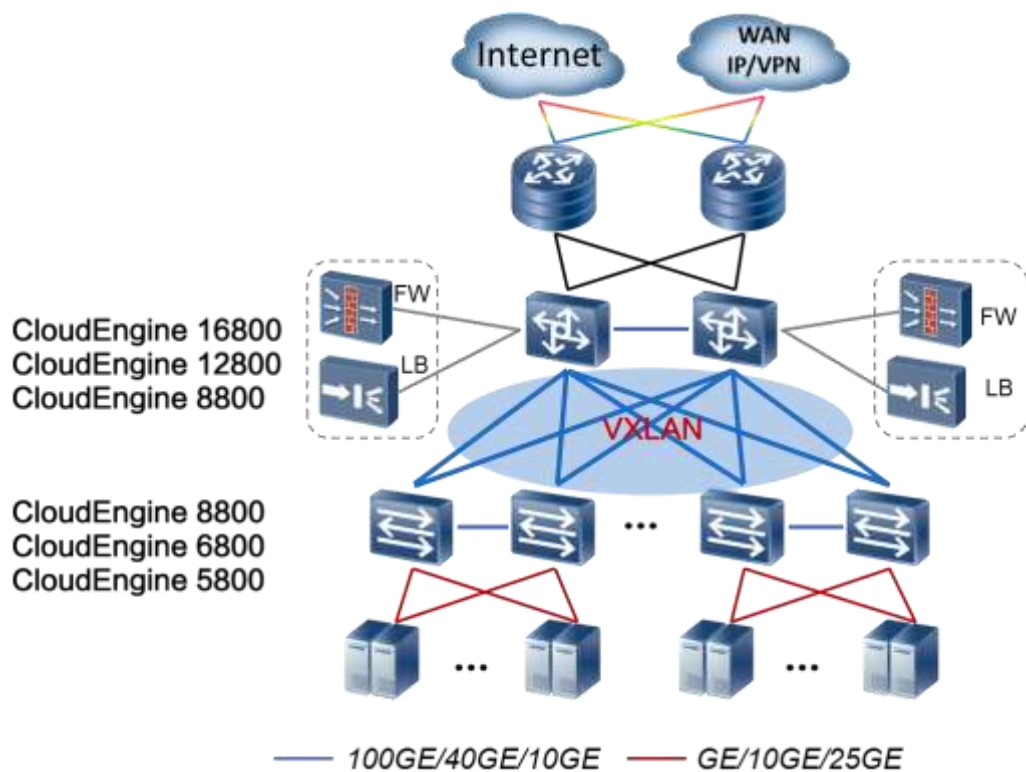


Campus Network Applications

CloudEngine 6870 switches can be used as aggregation or core switches on a campus network. Their high-density, line rate 10GE ports and high stacking capability can meet the ever-increasing demand for network bandwidth. CloudEngine 6800 switches are cost-effective campus network switches, thanks to their extensive service features and innovative energy-saving technologies.

On a typical campus network, multiple CloudEngine 12800/CloudEngine 8800 switches are virtualized into a logical core switch using CSS or iStack technology. Multiple CloudEngine 8800/CloudEngine 6800 switches at the aggregation layer form a logical switch using iStack technology. CSS and iStack improve network reliability and simplify network management. At the access layer, CloudEngine 6800/CloudEngine 5800 switches are virtualized with CloudFabric technology, such as M-LAG, to provide high-density line-rate ports.

Note: CSS, iStack and M-LAG are also widely used in data centers to facilitate network management.

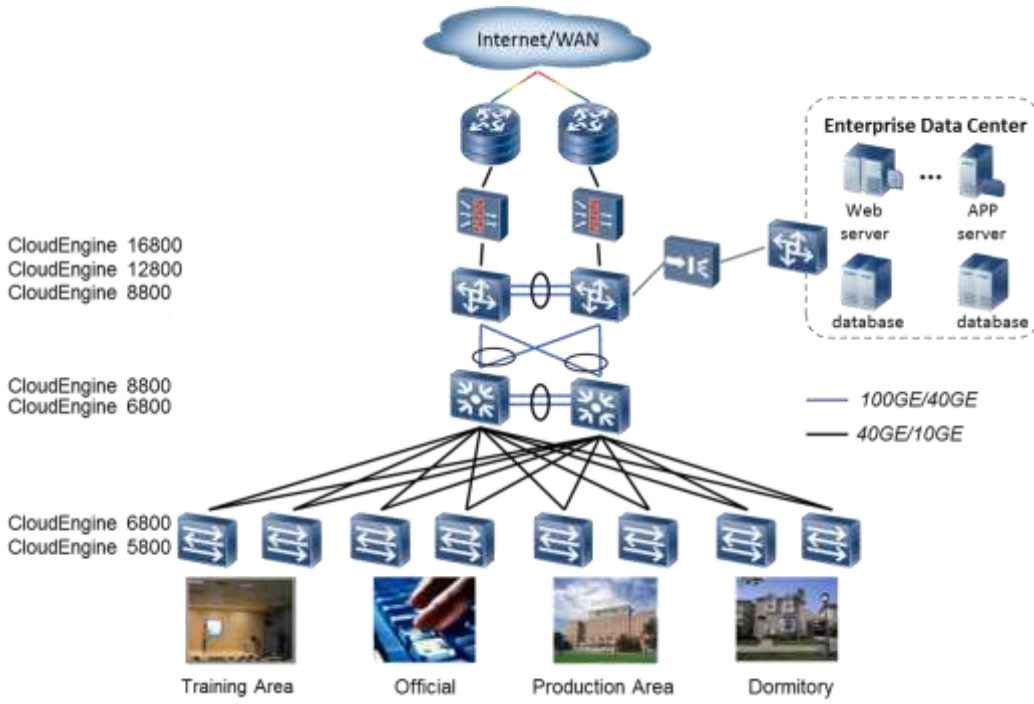

Copyright © Huawei Technologies Co., Ltd. 2020. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

Trademarks and Permissions



HUAWEI and other Huawei trademarks are trademarks of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

Notice

The purchased products, services and features are stipulated by the contract made between Huawei and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

Huawei Technologies Co., Ltd.

Address: Huawei Industrial Base Bantian, Longgang Shenzhen 518129 People's Republic of China

Website: www.huawei.com