

# Huawei CloudEngine 6880 Series Data Center Switches



HUAWEI TECHNOLOGIES CO., LTD.





# CloudEngine 6880 Series Data Center Switches

## Product Overview

Huawei CloudEngine 6880 (CE6880 for short) series switches are next-generation 10GE access switches that provide high performance and high port density on data center networks and high-end campus networks. The CE6880 has an advanced hardware architecture with 40GE/100GE uplink ports and the industry's highest density of 10GE access ports. Using Huawei's VRP8 software platform, CE6880 series switches support extensive data center features and high stacking capabilities. In addition, the CE6880 uses a flexible airflow design (front-to-back or back-to-front). CE6880 switches can work with Huawei CE12800 series data center core switches to build elastic, virtual, and high-quality 40GE/100GE full-mesh networks, meeting requirements of cloud computing data centers.

CE6880 series switches provide high-density 10GE access to help enterprises and carriers build a scalable data center network platform in the cloud computing era. They can also work as core or aggregation switches on campus networks.

## Product Appearance

CE6880 series switches are available in one model.

### CE6880-24S4Q2CQ-EI



24 x 10GE SFP+ ports, 4 x 40GE QSFP+ ports, and 2 x 100GE QSFP28 ports

## Product Characteristics

### High-Density 10GE Access

- The CE6880 provides up to 24 x 10GE ports, allowing for high-density 10GE server access and smooth evolution.
- The CE6880 provides up to 4 x 40GE QSFP+ ports and 2 x 100GE QSFP28 ports. Each QSFP28 port can also be used as one 40GE QSFP+ port, providing flexibility in networking. The uplink 40GE/100GE ports can be connected to CE12800 series switches to build a non-blocking network platform.

### Highly Reliable, Long-Distance Stacking

- Industry's first 16-member stack system

- » A stack system of 16 member switches has a maximum of 384 x 10GE access ports that provide high-density server access in a data center.
- » Multiple switches in a stack system are virtualized into one logical device, making it possible to build a scalable and easy-to-manage data center network platform.
- » A stack system separates the control plane from the data plane. This eliminates the risk of single points of failure and greatly improves system reliability.
- Long-distance stacking
  - » The CE6880 can use service ports as stack ports. A stack system can be established with switches in the same rack or different racks, and even over long distances.
  - » Service and stack bandwidths can be allocated based on the network scale to ensure that network resources are used more efficiently.

### Inter-device Link Aggregation, High Efficiency and Reliability

- The CE6880 supports multichassis link aggregation group (M-LAG), which enables links of multiple switches to aggregate into one to implement device-level link backup.
- Switches in an M-LAG system all work in active state to share traffic and back up each other, enhancing system reliability.
- Switches in an M-LAG system can be upgraded independently. During the upgrade, other switches in the system take over traffic forwarding to ensure uninterrupted services.
- M-LAG supports dual-homing to Ethernet, TRILL, VXLAN, and IP networks, allowing for flexible networking.

### Virtualized Hardware Gateway, Enabling Quick Deployment

- The CE6880 can connect to a cloud platform through open APIs, facilitating the unified management of virtual and physical networks.
- The CE6880 can work with the industry's mainstream virtualization platforms. The virtualization function protects investments by ensuring services can be deployed quickly without requiring network changes.
- The hardware gateway deployment enables fast service deployment without changing the customer network, providing investment protection.
- The CE6880 supports Border Gateway Protocol - Ethernet VPN (BGP-EVPN), which can run as the VXLAN control plane to simplify VXLAN configuration within and between data centers.

### Standard Interfaces, Enabling Openness and Interoperability

- The CE6880 supports NETCONF and can work with Huawei Agile Controller.
- The CE6880 supports Ansible-based automatic configuration and open-source module release, expanding network functions and simplifying device management and maintenance.
- The CE6880 series switches can be integrated into mainstream SDN and cloud computing platforms flexibly and quickly.

### ZTP, Implementing Automatic O&M

- The CE6880 supports Zero Touch Provisioning (ZTP). ZTP enables the CE6880 to automatically obtain and load version files from a USB flash drive or file server, freeing network engineers from onsite configuration and deployment. ZTP reduces labor costs and improves device

deployment efficiency.

- ZTP provides built-in scripts through open APIs. Data center personnel can use a programming language they are familiar with, such as Python, to centrally configure network devices.
- ZTP decouples the configuration time of new devices from the device quantity and area distribution, which improves service provisioning efficiency.

### FabricInsight-based Intelligent O&M

- The CE6880 supports global, precision time synchronization based on IEEE 1588v2, which achieves nanosecond-level delay detection.
- Huawei's Packet Conservation Algorithm for Internet (iPCA) technology implements accurate per-hop packet loss, delay, and jitter detection for real service flows, locating network faults in real time.
- The CE6880 proactively performs path detection over the entire network. It periodically checks sample flows to determine the connectivity of all paths on the network and locates fault points, providing real-time network health information.
- The CE6880 supports visualization of all flows and congestion, improving service experience.

### Flexible Airflow Design, Improving Energy Efficiency

- Flexible front-to-back/back-to-front airflow design
  - » The CE6880 uses a strict front-to-back/back-to-front airflow design that isolates cold air channels from hot air channels. This design improves heat dissipation efficiency and meets design requirements of data center equipment rooms.
  - » Air can flow from front to back or back to front depending on the fans and power modules that are used.
  - » Redundant power modules and fans can be configured to ensure service continuity.
- Innovative energy-saving technologies
  - » The CE6880 has innovative energy-saving chips and can measure system power consumption in real time. The fan speed can be adjusted dynamically based on system consumption. These energy-saving technologies reduce O&M costs and contribute to a greener data center.

### Clear Indicators, Simplifying Maintenance

- Clear indicators
  - » Port indicators clearly show the port status and port rate. The 100GE port indicators can show the states of all ports derived from the 100GE ports.
  - » State and stack indicators on both the front and rear panels enable users to maintain the switch from either side.
  - » The CE6880 supports remote positioning. Remote positioning indicators enable users to easily identify the switches they want to maintain in an equipment room full of devices.
- Simple maintenance
  - » The management port, fans, and power modules are on the front panel, which facilitates device maintenance.
  - » Data ports are located at the rear, facing servers. This simplifies cabling.

## Product Specifications<sup>1</sup>

### Functions and Features

Item	CE6880-24S4Q2CQ-EI
Device virtualization	iStack <sup>2</sup>
	M-LAG
Network virtualization	VXLAN
	BGP-EVPN
	QinQ access VXLAN
SDN	Agile Controller
Programmability	OPS programming
	OpenFlow
	Ansible-based automatic configuration and open-source module release
Traffic analysis	NetStream
VLAN	Adding access, trunk, and hybrid interfaces to VLANs
	Default VLAN
	QinQ
MAC address	Dynamic learning and aging of MAC address entries
	Static, dynamic, and blackhole MAC address entries
	Packet filtering based on source MAC addresses
	MAC address limiting based on ports and VLANs
IP routing	IPv4 routing protocols, such as RIP, OSPF, IS-IS, and BGP
	IPv6 routing protocols, such as RIPng, OSPFv3, IS-ISv6, and BGP4+
	IP packet fragmentation and reassembly

1.This content is applicable only to regions outside mainland China. Huawei reserves the right to interpret this content

2.For details about the configuration, please see: [http://support.huawei.com/online/toolsweb/virtual/en/dc/stack\\_index.html?dcb](http://support.huawei.com/online/toolsweb/virtual/en/dc/stack_index.html?dcb)

Item	CE6880-24S4Q2CQ-EI
IPv6	IPv6 Neighbor Discovery (ND)
	Path MTU Discovery (PMTU)
	TCP6, ping IPv6, tracer IPv6, socket IPv6, UDP6, and Raw IP6
Multicast	Multicast routing protocols such as IGMP, PIM-SM, and MBGP
	IGMP snooping
	IGMP proxy
	Fast leaving of multicast member interfaces
	Multicast traffic suppression
	Multicast VLAN
Reliability	Fine-grained microsegmentation isolation
	Link Aggregation Control Protocol (LACP)
	STP, RSTP, and MSTP
	Smart Link and multi-instance
	Device Link Detection Protocol (DLDP)
	Hardware-based Bidirectional Forwarding Detection (BFD)
	VRRP, VRRP load balancing, and BFD for VRRP
	BFD for BGP/IS-IS/OSPF/Static route
	BFD for VXLAN
QoS	Traffic classification based on Layer 2, Layer 3, Layer 4, and priority information
	ACL, CAR, re-marking, and scheduling
	Queue scheduling modes such as SP,DWRR and SP+DWRR
	Congestion avoidance mechanisms, including WRED and tail drop
	Traffic shaping

Item	CE6880-24S4Q2CQ-EI
O&M	IEEE 1588v2
	iPCA
	Network-wide path detection
	Telemetry
	Statistics on the buffer microburst status
	VXLAN OAM: VXLAN ping and VXLAN tracet
Configuration and maintenance	Console, Telnet, and SSH terminals
	Network management protocols, such as SNMPv1/v2c/v3
	File upload and download through FTP and TFTP
	BootROM upgrade and remote upgrade
	Hot patches
	User operation logs
	Zero Touch Provisioning (ZTP)
Security and management	Command line authority control based on user levels, preventing unauthorized users from using commands
	Defense against DoS address attacks, ARP storms, and ICMP attacks
	Port isolation, port security, and sticky MAC
	Binding of the IP address, MAC address, port number, and VLAN ID
	Authentication methods, including AAA, RADIUS, and HWTACACS
	Remote Network Monitoring (RMON)

## Performance and Scalability

Item	CE6880-24S4Q2CQ-EI
Maximum number of MAC address entries	176K
Maximum number of Forwarding routes (FIB IPv4/ IPv6)	128K/64K
ARP table size	128K
Maximum number of VRF	16384



Item	CE6880-24S4Q2CQ-EI
IPv6 ND(Neighbour Discovery) table size	32K
Maximum Number of multicast routes (Multicast FIB IPv4/IPv6)	132K/NA
Maximum VRRP groups	1024
Maximum number of ECMP paths	32
Maximum ACL number	64K
Maximum Number of broadcast domains	8000
Maximum number of BDIF	8000
Maximum number of tunnel endpoints (VTEP)	16K
Maximum number of lag group	1024/512/256/128/64
Maximum number of links in a lag group	2/4/8/16/32
Maximum number of MSTP instance	64

## Note

This specification may vary between different scenarios. Please contact Huawei for details.

## Hardware Specifications

Item		CE6880-24S4Q2CQ-EI
Physical Features	Dimensions (W × D ×H ,mm)	442*420*43.6
	Weight (excluding optical modules, power modules, and fan assemblies / including AC power modules and fan assemblies, excluding optical modules ,kg)	5.6/8.5
	Switching capacity(Tbit/s)	1.2
	Forwarding performance(Mpps)	406
10GE SFP+ ports		24
40GE QSFP+ ports		4

Item		CE6880-24S4Q2CQ-EI
100GE QSFP28 ports		2
Card	Number of card slot	0
	Card type	Fixed Switch
Management interface	Out-of-band management port	1*GE management interface
	Console port	1*RJ45 interface
	USB port	1
CPU	Main frequency(HZ)	1.5G
	Number of cores	8
Storage	RAM	2GB
	NOR Flash	32MB
	NAND Flash	1GB
System	System buffer	16.5MB
Power Supply System	Power modules	600 W AC/350 W -48V DC
	Rated voltage range(V)	100 V to 240 V AC -48 V to -60 V DC
	Maximum voltage range(V)	90~290 AC -38.4 V to -72 V DC
	Maximum input current	100 V to 240 V 9 A -48 V to -60 V DC 11 A
	Typical power	120W(100% traffic load, copper cable, normal temperature, dual power modules) 139W(100% traffic load, short-distance optical modules, normal temperature, dual power modules)
	Maximum power	224W
	Frequency (AC ,HZ)	50/60
Heat Dissipation	Heat dissipation mode	Air cooling
	Number of fans	2
	Heat dissipation airflow	Front-to-back or back-to-front airflow
	Maximum heat consumption (BTU/hr)	765

Item		CE6880-24S4Q2CQ-EI
Environment specifications	Long-term operating temperature(°C)	0 to 40°C(0-1800m) The temperature decreases by 1°C each time the altitude increases by 220 m.
	Storage temperature(°C)	-40°to +70°C
	Relative humidity	5% to 95%
	Operating altitude(m)	Up to 5000
	Sound power at 27°C (dBA)	Front-to-back airflow: < 65 Back-to-front airflow: < 68
	Sound power at 40°C (dBA)	Front-to-back airflow: < 88 Back-to-front airflow: < 86
	Sound pressure at 27°C (dBA)	Front-to-back airflow: 47 in average (maximum: 52) Back-to-front airflow: 46 in average (maximum: 52)
	Surge protection	AC power supply protection: 6 kV in common mode and 6 kV in differential mode DC power supply protection: 4 kV in common mode and 2 kV in differential mode
Reliability	MTBF (year)	61.41
	MTTR (hour)	1.78
	Availability	0.99999668259

## Note

For detailed information of CloudEngine 6880 Platform hardware information, visit <https://support.huawei.com/enterprise/en/doc/EDOC1000019246?idPath=7919710%7C21782165%7C21782239%7C22318540%7C7597815>

## Safety and Regulatory Compliance

The following table lists the safety and regulatory compliance of CE 6880 series switches.

Certification Category	Description
Safety	<ul style="list-style-type: none"> <li>• EN 60950-1: 2006+A11: 2009+A1: 2010+A12: 2011</li> <li>• EN 60825-1: 2007</li> <li>• EN 60825-2:2010</li> <li>• UL 60950-1: 2007 2nd Edition</li> <li>• CSA C22.2 No.650: 2007 2nd Edition</li> <li>• IEC 60950-1: 2005+A1: 2009</li> <li>• AS/NZS 60950-1: 2011</li> <li>• GB4943: 2011</li> </ul>
Electromagnetic Compatibility (EMC)	<ul style="list-style-type: none"> <li>• FCC 47CFR Part15 CLASS A</li> <li>• ETSI EN 300 386 V1.6.1: 2012</li> <li>• ICES-003: 2012 CLASS A</li> <li>• CISPR 22: 2008 CLASS A</li> <li>• CISPR 24: 2010</li> <li>• EN 55022: 2010 CLASS A</li> <li>• EN 55024: 2010</li> <li>• AS/NZS CISPR 22: 2009 CLASS A</li> <li>• IEC 61000-3-2: 2005+A1: 2008+A2: 2009/EN 61000-3-2: 2006+A1: 2009+A2: 2009</li> <li>• IEC 61000-3-3: 2008/EN 61000-3-3: 2008</li> <li>• CNS 13438: 2006 CLASS A</li> <li>• VCCI V-4: 2012 CLASS A</li> <li>• VCCI V-3: 2012 CLASS A</li> <li>• EC Council Directive 2004/108/EC</li> <li>• GB9254</li> </ul>
Environment	<ul style="list-style-type: none"> <li>• 2002/95/EC, 2011/65/EU</li> <li>• 2002/96/EC, 2012/19/EU</li> <li>• EC NO.1907/2006</li> <li>• ETSI EN 300 019-1-1 V2.1.4</li> <li>• ETSI EN 300 019-1-2 V2.1.4</li> <li>• ETSI EN 300 019-1-3 V2.3.2</li> <li>• ETSI EN 300753 V1.2.1</li> </ul>

## Note

EMC: electromagnetic compatibility

CISPR: International Special Committee on Radio Interference

EN: European Standard

ETSI: European Telecommunications Standards Institute

CFR: Code of Federal Regulations

FCC: Federal Communication Commission

IEC: International Electrotechnical Commission

AS/NZS: Australian/New Zealand Standard

VCCI: Voluntary Control Council for Interference

UL: Underwriters Laboratories

CSA: Canadian Standards Association

IEEE: Institute of Electrical and Electronics Engineers

RoHS: restriction of the use of certain hazardous substances

REACH: Registration Evaluation Authorization and Restriction of Chemicals

WEEE: Waste Electrical and Electronic Equipment

## Supported MIBs

The following table lists the MIBs supported by CE 6880 series switches.

Category	MIB
Public MIB	<ul style="list-style-type: none"> <li>• BRIDGE-MIB</li> <li>• BGP4-MIB</li> <li>• BRIDGE-MIB</li> <li>• DISMAN-PING-MIB</li> <li>• DISMAN-TRACEROUTE-MIB</li> <li>• ENTITY-MIB</li> <li>• IF-MIB</li> <li>• IP-FORWARD-MIB</li> <li>• IP-MIB</li> <li>• IPv6-ICMP-MIB</li> <li>• IPv6-MIB</li> <li>• IPv6-TCP-MIB</li> <li>• IPv6-UDP-MIB</li> <li>• ISIS-MIB</li> <li>• LAG-MIB</li> <li>• LLDP-EXT-DOT1-MIB</li> <li>• LLDP-EXT-DOT3-MIB</li> <li>• LLDP-MIB</li> <li>• MAU-MIB</li> <li>• MGMD-STD-MIB</li> <li>• MSDP-MIB</li> <li>• NOTIFICATION-LOG-MIB</li> <li>• NQA-MIB</li> <li>• OSPF-MIB</li> <li>• OSPF-TRAP-MIB</li> <li>• OSPFV3-MIB</li> <li>• P-BRIDGE-MIB</li> <li>• PIM-BSR-MIB</li> <li>• PIM-STD-MIB</li> <li>• Q-BRIDGE-MIB</li> <li>• RADIUS-AUTH-CLIENT-MIB</li> <li>• RFC1213-MIB</li> <li>• RIPv2-MIB</li> <li>• RMON-MIB</li> <li>• SNMP-FRAMEWORK-MIB</li> <li>• SNMP-MPD-MIB</li> <li>• SNMP-NOTIFICATION-MIB</li> <li>• SNMP-PROXY-MIB</li> <li>• SNMP-TARGET-MIB</li> <li>• SNMP-USER-BASED-SM-MIB</li> <li>• SNMPv2-MIB</li> <li>• SNMP-VIEW-BASED-ACM-MIB</li> <li>• TCP-MIB</li> <li>• UDP-MIB</li> <li>• VRRP-MIB</li> </ul>

Category	MIB
Huawei-proprietary MIB	<ul style="list-style-type: none"> <li>• HUAWEI-AAA-MIB</li> <li>• HUAWEI-ACL-MIB</li> <li>• HUAWEI-ALARM-MIB</li> <li>• HUAWEI-BASE-TRAP-MIB</li> <li>• HUAWEI-BFD-MIB</li> <li>• HUAWEI-BGP-VPN-MIB</li> <li>• HUAWEI-BRAS-RADIUS-MIB</li> <li>• HUAWEI-CBQOS-MIB</li> <li>• HUAWEI-CE-PING-MIB</li> <li>• HUAWEI-CONFIG-MAN-MIB</li> <li>• HUAWEI-CPU-MIB</li> <li>• HUAWEI-DAD-MIB</li> <li>• HUAWEI-DATASYNC-MIB</li> <li>• HUAWEI-DEVICE-MIB</li> <li>• HUAWEI-DEVICE-EXT-MIB</li> <li>• HUAWEI-DHCPR-MIB</li> <li>• HUAWEI-DHCP-SNOOPING-MIB</li> <li>• HUAWEI-DHCPV6-SERVER-MIB</li> <li>• HUAWEI-DLDP-MIB</li> <li>• HUAWEI-ENERGYMNGT-MIB</li> <li>• HUAWEI-ENTITY-TRAP-MIB</li> <li>• HUAWEI-ENTITY-EXTENT-MIB</li> <li>• HUAWEI-ERRORDOWN-MIB</li> <li>• HUAWEI-ETHARP-MIB</li> <li>• HUAWEI-EVC-MIB</li> <li>• HUAWEI-FLASH-MAN-MIB</li> <li>• HUAWEI-FTP-MIB</li> <li>• HUAWEI-FWD-RES-TRAP-MIB</li> <li>• HUAWEI-FWD-PAF-TRAP-MIB</li> <li>• HUAWEI-GTL-MIB</li> <li>• HUAWEI-HWTACACS-MIB</li> <li>• HUAWEI-INFOCENTER-MIB</li> <li>• HUAWEI-IF-EXT-MIB</li> <li>• HUAWEI-IPFPM-MIB</li> <li>• HUAWEI-ISIS-CONF-MIB</li> <li>• HUAWEI-L2IF-MIB</li> <li>• HUAWEI-L2MAM-MIB</li> <li>• HUAWEI-L2MULTICAST-MIB</li> <li>• HUAWEI-L2VLAN-MIB</li> <li>• HUAWEI-LINE-MIB</li> <li>• HUAWEI-LLDP-MIB</li> <li>• HUAWEI-M-LAG-MIB</li> <li>• HUAWEI-MEMORY-MIB</li> <li>• HUAWEI-MFLP-MIB</li> <li>• HUAWEI-MIB</li> <li>• HUAWEI-MSTP-MIB</li> <li>• HUAWEI-ND-MIB</li> <li>• HUAWEI-NETCONF-MIB</li> <li>• HUAWEI-NETSTREAM-MIB</li> <li>• HUAWEI-NTP-TRAP-MIB</li> <li>• HUAWEI-NVO3-MIB</li> <li>• HUAWEI-OPENFLOW-MIB</li> </ul>

Category	MIB
Huawei-proprietary MIB	<ul style="list-style-type: none"> <li>• HUAWEI-OSPFV2-MIB</li> <li>• HUAWEI-OSPFV3-MIB</li> <li>• HUAWEI-OVSDB-MIB</li> <li>• HUAWEI-PERFMGMT-MIB</li> <li>• HUAWEI-PIM-STD-MIB</li> <li>• HUAWEI-PORT-MIB</li> <li>• HUAWEI-RIPv2-EXT-MIB</li> <li>• HUAWEI-RM-EXT-MIB</li> <li>• HUAWEI-SECURITY-MIB</li> <li>• HUAWEI-SMARTLINK-MIB</li> <li>• HUAWEI-SNMP-EXT-MIB</li> <li>• HUAWEI-SSH-MIB</li> <li>• HUAWEI-STACK-MIB</li> <li>• HUAWEI-SWITCH-L2MAM-EXT-MIB</li> <li>• HUAWEI-SYS-CLOCK-MIB</li> <li>• HUAWEI-SYS-MAN-MIB</li> <li>• HUAWEI-TASK-MIB</li> <li>• HUAWEI-TCP-MIB</li> <li>• HUAWEI-TRNG-MIB</li> <li>• HUAWEI-VRRP-EXT-MIB</li> <li>• HUAWEI-XQOS-MIB</li> </ul>

## NOTE

For detailed information of MIB information, visit <http://support.huawei.com/hedex/hdx.do?docid=EDOC1100020548&lang=en&idPath=7919710%7C21782165%7C21782239%7C22318540%7C7597815> or contact your local Huawei sales office.

## Optical transceivers and Cables

Part	Product
GE-SFP Optical Transceivers	
SFP-1000BaseT	Electrical Transceiver, SFP, GE, Electrical Interface Module (100m, RJ45)
eSFP-GE-SX-MM850	Optical Transceiver, eSFP, GE, Multi-mode Module (850nm, 0.55km, LC)
SFP-GE-LX-SM1310	Optical Transceiver, eSFP, GE, Single-mode Module (1310nm, 10km,LC)
S-SFP-GE-LH40-SM1310	Optical Transceiver, eSFP, GE, Single-mode Module(1310nm,40km,LC)



Part	Product
S-SFP-GE-LH80-SM1550	Optical Transceiver, eSFP, GE, Single-mode Module(1550nm,80km,LC)
eSFP-GE-ZX100-SM1550	Optical Transceiver, eSFP, GE, Single-mode Module(1550nm,100km,LC)
BIDI-SFP Optical Transceivers	
SFP-GE-LX-SM1490-BIDI	Optical Transceiver, eSFP, GE, BIDI Single-mode Module (TX1490/RX1310, 10km,LC)
SFP-GE-LX-SM1310-BIDI	Optical Transceiver, eSFP, GE, BIDI Single-mode Module (TX1310/RX1490, 10km, LC)
LE2MGSC40ED0	Optical Transceiver, eSFP, GE, BIDI Single-mode Module (TX1490/RX1310, 40km, LC)
LE2MGSC40DE0	Optical Transceiver, eSFP, GE, BIDI Single-mode Module (TX1310/RX1490, 40km,LC)
10G-SFP+ Optical Transceivers	
SFP-10G-USR	10GBase-USR Optical Transceiver,SFP+,10G,Multi-mode Module (850nm, 0.1km, LC)
OMXD30000	Optical Transceiver,SFP+,10G,Multi-mode Module(850nm,0.3km,LC)
SFP-10G-LR	Optical Transceiver,SFP+,10G,Single-mode Module(1310nm,10km,LC)
OSX040N01	Optical Transceiver,SFP+,10G,Single-mode Module(1550nm,40km,LC)
SFP-10G-ZR	10GBase-ZR Optical Transceiver, SFP+, 10G, Single-mode Module (1550nm, 80km, LC)
SFP-10G-iLR	Optical Transceiver,SFP+,9.8G,Single-mode Module(1310nm,1.4km,LC)
40GE-QSFP+ Optical Transceivers	
QSFP-40G-SR-BD	40GBase-BD Optical Transceiver,QSFP+,40G,Multi-mode (850nm,0.1km,LC)
QSFP-40G-iSR4	40GBase-iSR4 Optical Transceiver, QSFP+, 40G, Multi-mode (850nm, 0.15km, MPO) (Connect to four SFP+ Optical Transceiver)
QSFP-40G-eSR4	40GBase-eSR4 Optical Transceiver, QSFP+, 40G, Multi-mode (850nm, 0.3km, MPO) (Connect to four SFP+ Optical Transceiver)
QSFP-40G-LX4	40GBase-LX4 Optical Transceiver, QSFP+, 40GE, Single-mode (1310nm, 2km, LC), Multi-mode(1310nm, 0.15km, LC)

Part	Product
QSFP-40G-eSM4	40GBase-eSM4 Optical Transceiver, QSFP+, 40G, Single-mode Module (1310nm, 10km, MPO) (Connect to four SFP+ Optical Transceiver)
QSFP-40G-LR4	40GBase-LR4 Optical Transceiver, QSFP+, 40GE, Single-mode Module (1310nm, 10km, LC)
QSFP-40G-LR4-Lite	QSFP-40G-LR4-Lite,40GBase-LR4 Lite Optical Transceiver,QSFP+,40G,Single-mode Module(1310nm,2km,LC)
QSFP-40G-ER4	40GBase-ER4 Optical Transceiver, QSFP+, 40G, Single-mode Module (1310nm, 40km, LC)
QSFP-40G-SDLC-PAM	40GBase-SDLC Optical Transceiver, QSFP+, 40G, Multi-mode (850nm, PAM4, 0.1km, LC)
QSFP-40G-eSDLC-PAM	40GBase-eSDLC Optical Transceiver, QSFP+, 40G, Multi-mode (850nm, PAM4, 0.3km, LC)
100GE-QSFP28 Optical Transceivers	
QSFP-100G-SWDM4	100GBase-SWDM4 Optical Transceiver,QSFP+,100GE,Multi-mode Module(850,0.075km-OM3,0.1km-OM4,LC)
QSFP28-100G-SR4	100GBase-SR4 Optical Transceiver, QSFP28, 100G, Multi-mode (850nm, 0.1km, MPO)
QSFP28-100G-LR4	100GBase-LR4 Optical Transceiver, QSFP28, 100G, Single-mode module (1310nm, 10km, LC)
QSFP28-100G-PSM4	100GBase-PSM4 Optical Transceiver, QSFP28, 100G, Single-mode module (1310nm, 0.5km, MPO)
QSFP-100G-CWDM4	100GBase-CWDM4 Optical Transceiver, QSFP28, 100G, Single-mode module (1310nm, 2km, LC)
QSFP-100G-ER4-Lite	100GBase-ER4-Lite Optical Transceiver,QSFP28,100G,Single-mode module (1310nm,30km(FEC OFF),40km(FEC ON),LC)
AOC High-Speed Cables	
SFP-10G-AOC-5M	Active Optical Cable , SFP+, 10G, (850nm, 5m, AOC)
SFP-10G-AOC-7M	Active Optical Cable , SFP+, 10G, (850nm, 7m, AOC)
SFP-10G-AOC-10M	AOC Optical Transceiver, SFP+, 850nm, 1G~10G, 10m
SFP-10G-AOC-3M	Optical transceiver, SFP+, 1G~10.5G, (850nm, 3m, AOC)
QSFP-H40G-AOC10M	Optical transceiver, QSFP+, 40G, (850nm, 10m, AOC)
QSFP-4SFP10-AOC10M	Optical transceiver, QSFP+, 40G, (850nm, 10m, AOC)(Connect to four SFP+ Optical Transceiver)

Part	Product
QSFP-100G-AOC-10M	Active Optical Cable ,QSFP28,100G,(850nm,10m,AOC)
QSFP-100G-AOC-30M	Active Optical Cable ,QSFP28,100G,(850nm,30m,AOC)
Copper Cable	
SFP-10G-CU1M	SFP+, 10G, High Speed Direct-attach Cables, 1m, SFP+20M, CC2P0.254B(S), SFP+20M, Used indoor
SFP-10G-CU3M	SFP+, 10G, High Speed Direct-attach Cables, 3m, SFP+20M, CC2P0.254B(S), SFP+20M, Used indoor
SFP-10G-CU5M	SFP, 10G, High Speed Cable, 5m, SFP+20M, CC2P0.254B(S), SFP+20M, LSRZHZ For Indoor
SFP-10G-AC7M	SFP, 10G, Active High Speed Cable, 7m, SFP+20M, CC2P0.254B(S), SFP+20M, LSRZHZ For Indoor
SFP-10G-AC10M	SFP+, 10G, Active High Speed Cables, 10m, SFP+20M, CC2P0.32B(S), SFP+20M, Used indoor

## Ordering Information

### Mainframe

CE6880-EI-B-B0B	CE6880-EI-B-B0B,CE6880-24S4Q2CQ-EI Switch(24*10G SFP+,4*40G QSFP+,2*100G QSFP28,2*AC Power Module,2*FAN Box,Port-side Intake)
CE6880-EI-F-B0B	CE6880-24S4Q2CQ-EI Switch(24*10G SFP+,4*40G QSFP+,2*100G QSFP28,2*AC Power Module,2*FAN Box,Port-side Exhaust)
CE6880-24S4Q2CQ-EI	CE6880-24S4Q2CQ-EI Switch(24*10G SFP+,4*40G QSFP+,2*100G QSFP28,2*AC Power Module,2*FAN Box,Port-side Exhaust)

### Fan Tray

Model	Description	Applicable Product
FAN-40HA-F	Fan box (HA, Front to Back, FAN panel side intake)	CE6880-24S4Q2CQ-EI
FAN-40HA-B	Fan box (HA, Back to Front, FAN panel side exhaust)	CE6880-24S4Q2CQ-EI

### Power

Model	Description	Applicable Product
-------	-------------	--------------------

PAC-600WA-F	600W AC Power Module (Front to Back, Power panel side intake)	CE6880-24S4Q2CQ-EI
PAC-600WA-B	600W AC Power Module (Back to Front, Power panel side exhaust)	CE6880-24S4Q2CQ-EI
PDC-350WA-F	350W DC Power Module (Front to Back, Power panel side intake)	CE6880-24S4Q2CQ-EI
PDC-350WA-B	350W DC Power Module (Back to Front, Power panel side exhaust)	CE6880-24S4Q2CQ-EI

### Software


CE68-LIC-BUN01	CE6800 Function License Bundle 1
CE68-LIC-VXLAN	CloudEngine 6800 VXLAN Function
CE68-LIC-NSH	NSH Function
CE68-LIC-TLM	CloudEngine 6800 Telemetry Function
N1-CE68LIC-CFFD	N1-CloudFabric Foundation SW License for CloudEngine 6800
N1-CE68CFFD-SYS1Y	N1-CloudFabric Foundation SW License for CloudEngine 6800-SnS-1 Year
N1-CE68LIC-CFAD	N1-CloudFabric Advanced SW License for CloudEngine 6800
N1-CE68CFAD-SYS1Y	N1-CloudFabric Advanced SW License for CloudEngine 6800-SnS -1 Year

## Networking and Application

### Data Center Applications

On a typical data center network, CE6880 switches work as TOR switches and connect to CE12800, CE8800, or CE7800 core switches using 40GE/100GE ports, building an end-to-end 100GE full-mesh network. The core and TOR switches use fabric technologies such as VXLAN to build a non-blocking large Layer 2 network, which allows for large-scale VM migration and flexible service deployment.

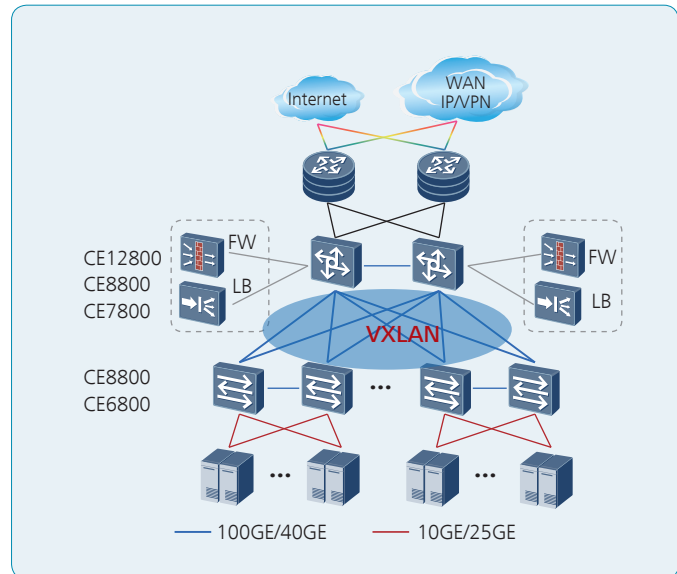

Note: VXLAN can also be used on campus networks to support flexible service deployment in different service areas.



**Copyright © Huawei Technologies Co., Ltd. 2018. All rights reserved.**

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

**Trademark Notice**

 , HUAWEI, and  are trademarks or registered trademarks of Huawei Technologies Co., Ltd. Other trademarks, product, service and company names mentioned are the property of their respective owners.

**General Disclaimer**

The information in this document may contain predictive statements including, without limitation, statements regarding the future financial and operating results, future product portfolio, new technology, etc. There are a number of factors that could cause actual results and developments to differ materially from those expressed or implied in the predictive statements. Therefore, such information is provided for reference purpose only and constitutes neither an offer nor an acceptance. Huawei may change the information at any time without notice.

HUAWEI TECHNOLOGIES CO.,LTD.  
Huawei Industrial Base  
Bantian Longgang  
Shenzhen 518129,P.R.China  
Tel: +86 755 28780808

[www.huawei.com](http://www.huawei.com)